

# Flux Meter TFM-2000ACP type

(Manufacturer: TOYO MEASURING SYSTEM CO., LTD.)




**New Feature Included!!**

★PC-Link Function

★Data Acquisition Function

## Feature

- The design attached great importance to high stability and miniaturization for automatic measuring system of production-line.
- Assign measurements to Excel automatically and it is possible for data management / statistics treatment / graph treatment by adding optional PC Pack.
- For universal specification of wide input power source (AC90V ~ 240V), you can use it in Japan and overseas.
- Realized price reduction by making it option except for normal function.

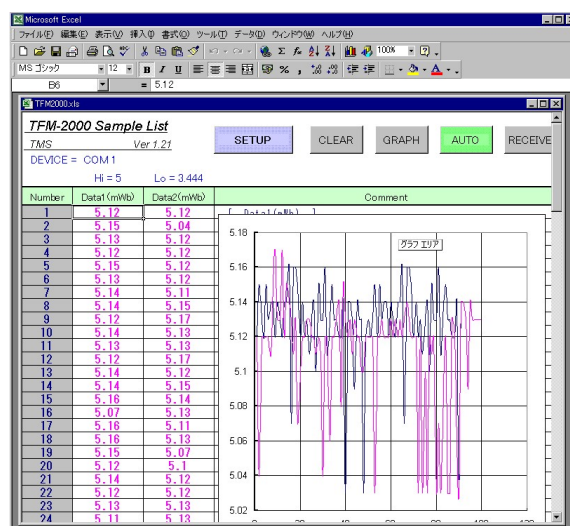

## Standard specification

|                            |                                                                       |
|----------------------------|-----------------------------------------------------------------------|
| Primary input power source | AC 90 ~ 240V 50 / 60Hz within 10VA                                    |
| Display range              | 0.001 ~ 99.99mWb                                                      |
| Drift accuracy             | Within $\pm 1\%$ of Full scale                                        |
| Display mode               | Normal / Peak hold is selectable                                      |
| Turn set                   | 1 ~ 999 (Three digit)                                                 |
| Accessories                | AC cable / Instruction manual                                         |
| Dimension                  | 80 H $\times$ 180 W $\times$ 250 D<br>(except for protruding portion) |

|                 |                                                                                                                 |
|-----------------|-----------------------------------------------------------------------------------------------------------------|
| Analog output   | 1V / FS                                                                                                         |
| Decision output | Bound pair configuration : each 4 digit<br>Lo/Go/High (open collector output)<br>External reset (contact input) |
| PC Pack         | RS232C I/F<br>(include PC software / interconnection cable)                                                     |
|                 |                                                                                                                 |
|                 |                                                                                                                 |



General Sales Agency

**Magnet Force Co., Ltd.**

20-12, Enoki-cho, Suita City, Osaka  
564-0053 JAPAN

TEL 81-6-6378-8484 FAX 81-6-6378-8488

info@magnetforce.co.jp

http://www.magnetforce.co.jp